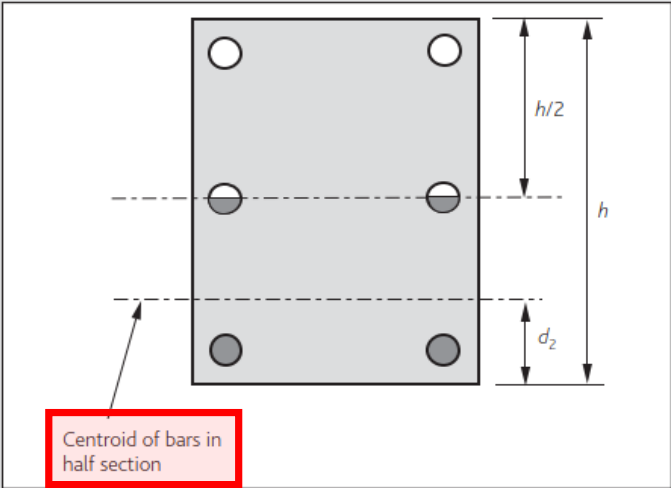


| CONSULTING ENGINEERS | | Engineering Calculation Sheet Consulting Engineers | | Job No. | Sheet No. | Rev. |
|---|--|---|--|--|-----------|--------------------|
| | | | | jXXX | 1 | |
| Member/Location | | | | Drg. Ref. | | |
| Job Title | | | | Member Design - RC Column Slenderness Effects | | |
| Member Design - RC Column Slenderness Effects | | | | Made by | XX | Date |
| | | | | 20/4/2026 Chd. | | |
| Material Properties | | | | | | |
| Characteristic strength of concrete (column), $f_{cu} \mid f_{ck}/f_c' (f_{cu} \leq 105N)$ | | | | 80 | 65 | N/mm ² |
| Yield strength of longitudinal steel, f_y | | | | Higher | 500 | N/mm ² |
| Yield strength of shear link steel, f_{yv} | | | | Higher | 500 | N/mm ² |
| Modulus of elasticity, $E_c = 20+0.2f_{cu} \mid 22[(f_{ck}+8)/10]^{0.3} \mid 4700\sqrt{f_c'}$ | | | | ACI318 | 37.9 | kN/mm ² |
| Section Dimensions | | | | | | |
| Section type | | | | Rectangular | | |
| Depth (larger), h (rectangular) or diameter, D (circular) | | | | 2,900 mm | | |
| Width (smaller), b (rectangular) or N/A (circular) | | | | 900 mm | | |
| Area of section, $A_c = b.h$ (rectangular) or $\pi D^2/4$ (circular) | | | | 2.610 m ² | | |
| | | | | Major | Minor | |
| Second moment of area, $I_{x y} = b.h^3/12 \mid h.b^3/12 \mid \pi D^4/64$ | | | | 1.829 | 0.176 | m ⁴ |
| Radius of gyration, $r_{x y} = \sqrt{I_{x y}/A_c}$ | | | | 837 | 260 | mm |
| Location internal (=2.0) or edge (=1.0), IE | | | | Internal | Internal | 2 |
| | | | | | | |
| $b = 900$ mm Cover = 25 mm Concrete = C65/80 | | | | $A_{sc} = 62H32$ Links Rebars = 500 MPa Links = 500 MPa Steel % = 1.91 % | | |
| Effective Depth and Width | | | | | | |
| | | | | Major | Minor | |
| No.s of layers of steel at each extremity for rect cols, $n_{layers,h} \mid n_{layers,b}$ | | | | 6 | 2 | layer(s) |
| Spacer reinforcement, $s_r = \text{MAX}(\phi, 25\text{mm}, \text{user})$ | | | | 85 | 85 | mm |
| Effective depth, $h' = h - \text{cover}_{main} - [\phi + (n_{layers,h} - 1)(\phi + s_r)]/2$ rect $= D - \text{cover}_{main} - \phi/2$ circular | | | | 88% | 2,555 | mm |
| Effective width, $b' = b - \text{cover}_{main} - [\phi + (n_{layers,b} - 1)(\phi + s_r)]/2$ rect $= D - \text{cover}_{main} - \phi/2$ circular | | | | 88% | 789 | mm |
| Longitudinal and Shear Reinforcement Details | | | | | | |
| Longitudinal steel reinforcement diameter, ϕ | | | | 32 | | mm |
| Longitudinal steel area % (uniaxial), $[A_{sc}/A_c].100\%$ | | | | 1.91 | | |
| Longitudinal steel area % (orthogonal), $[A_{sc+}/A_c].100\%$ | | | | 0.00 % | | |
| Total longitudinal steel area % (uniaxial+orthogonal), $\{[A_{sc}+A_{sc+}]/A_c\}.100\%$ | | | | 1.91 % | | |
| Total longitudinal steel area provided, $A_{sc}+A_{sc+} = \{[A_{sc}+A_{sc+}]/A_c\}.100\%.A_c$ | | | | 49,863 mm ² | | |
| Total longitudinal steel reinforcement number, $n_l = [A_{sc}+A_{sc+}]/(\pi.\phi^2/4)$ | | | | 62 H32 | | |
| Shear link diameter, ϕ_{link} | | | | 12 | | mm |
| Cover to all reinforcement, cover (usually 35 (C35) or 30 (C40) internal; 40 ex | | | | 25 mm | | |
| Cover to main reinforcement, $\text{cover}_{main} = \text{cover} + \phi_{link}$ | | | | 37 mm | | |

| CONSULTING ENGINEERS | | Engineering Calculation Sheet Consulting Engineers | | Job No. | Sheet No. | Rev. |
|--|--|---|--|-------------------------------|-----------|---------------------|
| | | | | jXXX | 2 | |
| | | | | Member/Location | | |
| Job Title | Member Design - Reinforced Concrete Column Slenderness | | | Drg. Ref. | | |
| Member Design - RC Column Slenderness Effects | | | | Made by | XX | Date 20/4/2026 Chd. |
| Effects From Structural Analysis | | | | Do not adopt code equivalence | | Note |
| Axial force, N (tension -ve and comp +ve) (ensure >= 0) | | | | Major | Minor | OK |
| | | | | 100,000 | kN | |
| Shear force, V_y V_z | | | | 0 | 0 | kN |
| Primary bending moment at top, $M_{xp,t}$ $M_{yp,t}$ | | | | 5,000 | 1,000 | kNm |
| Primary bending moment at bot., $M_{xp,b}$ $M_{yp,b}$ | | | | 3,000 | 500 | kNm |
| Primary bending moment min., $M_1 = \text{MIN}\{M_{xp,tr}, M_{xp,b}\} \text{MIN}\{M_{yp,tr}, M_{yp,b}\}$ | | | | 3,000 | 500 | kNm |
| Primary bending moment max., $M_2 = \text{MAX}\{M_{xp,tr}, M_{xp,b}\} \text{MAX}\{M_{yp,tr}, M_{yp,b}\}$ | | | | 5,000 | 1,000 | kNm |
| Restraint Dimensions | | | | Major | Minor | |
| Column storey (floor to floor) height, l_{storey} | | | | 4,500 | 4,500 | mm |
| Column clear height, $l_{clear,xy} = l_{storey} - h_{rest}$ | | | | 4,050 | 4,050 | mm |
| Restraint depth, h_{rest} | | | | 450 | 450 | mm |
| Restraint width, b_{rest} | | | | 3,000 | 3,000 | mm |
| Restraint span, l_{rest} | | | | 8,500 | 8,500 | mm |
| Restraint sec. moment of area, $I_{rest} = b_{rest} \cdot h_{rest}^3 / 12$ | | | | 0.023 | 0.023 | m ⁴ |
| Stiffness parameter, $k_{1,x y} = k_{2,x y} = (I_{x y} / l_{clear,x y}) / [IE_{\Sigma 2}(I_{rest} / l_{rest})]$ | | | | 4.2E+01 | 4.1E+00 | MOSLEY |
| Effective Depth and Width Calculation With Multiple Layers of Steel at Each Extremity | | | | | | |
| <i>Note that the no. of layer, n_{layers} may be increased to include layers beyond the face of the column and up to and until the centroid of the section, user-spaced accordingly, with the lumping of all rebar within the uniaxial bending steel area, A_{sc} without any orthogonal bending steel area, A_{sc+}, such that the ratio of h'/h or $b'/b \approx 75\%$, whichever relevant;</i> | | | | | | |
| <p>Where reinforcement is not concentrated in the corners, a conservative approach is to calculate an effective value of d_2 as illustrated in Figure 15.4.</p> <p>d_2 = effective depth to steel in layer 2</p>  <p style="text-align: right;">Figure 15.4 Method of assessing d_2 including side bars</p> | | | | | | |

| CONSULTING ENGINEERS | | Engineering Calculation Sheet Consulting Engineers | | Job No. | Sheet No. | Rev. |
|--|--|---|--|-----------------|-----------|---------------------|
| | | | | jXXX | 3 | |
| | | | | Member/Location | | |
| Job Title | Member Design - Reinforced Concrete Column Slenderness | | | Drg. Ref. | | |
| Member Design - RC Column Slenderness Effects | | | | Made by | XX | Date 20/4/2026 Chd. |
| Summary of Effects From Slenderness Analysis | | | | | | |
| | | | | Major | Minor | |
| Braced or unbraced column ? | | | | Braced | ▼ | Braced |
| Note braced or unbraced column affects slenderness limits criteria, effective height factor and slenderness magnification factor | | | | | | |
| Note braced = {column / wall stabilized by other bracing, shear walls or core walls and outriggers}; | | | | | | |
| Note unbraced = {column / wall stabilized by bending in itself (columns in moment frames, tube major plane)}; | | | | | | |
| Note unbraced cantilever = {column / wall stabilized by bending in itself (shear wall major plane, cantilever pier)}; | | | | | | |
| Axial force, N (tension -ve and comp +ve) (ensure >= 0) | | | | 100,000 | kN | |
| Pure axial cap., $N_0 = 0.45f_{cu}.A_c + 0.95f_y.(A_{sc} + A_{sc+})$ | | | | BS110 | 115,750 | 86% |
| Code axial cap., $N_{cap} = 0.40f_{cu}.A_c + 0.80f_y.(A_{sc} + A_{sc+})$ | | | | BS110 | 101,870 | 98% |
| Code axial stress wrt strength ratio, $[N_{cap}/A_c]/f_{cu}$ | | | | | 49% | |
| Axial force, N (tension -ve and comp +ve) (ensure >= 0) | | | | 100,000 | kN | |
| Pure axial cap., $N_0 = \eta.0.567f_{ck}.A_c + 0.87f_y.(A_{sc} + A_{sc+})$ | | | | EC2 | 110,668 | 90% |
| Code axial cap., $N_{cap} = \eta.0.50f_{ck}.A_c + 0.76f_y.(A_{sc} + A_{sc+})$ | | | | EC2 | 97,411 | 103% |
| Code axial stress wrt strength ratio, $[N_{cap}/A_c]/f_{cu}$ | | | | | 47% | |
| Axial force, N (tension -ve and comp +ve) (ensure >= 0) | | | | 100,000 | kN | |
| Pure axial cap., $N_0 = 0.80.[0.85f'_c.[A_c - (A_{sc} + A_{sc+})] + f_y.(A_{sc} + A_{sc+})]$ | | | | ACI318 | 133,103 | 75% |
| Code axial cap., $N_{cap} = \phi.0.80.[0.85f'_c.[A_c - (A_{sc} + A_{sc+})] + f_y.(A_{sc} + A_{sc+})]$ | | | | ACI318 | 86,517 | 116% |
| Code axial stress wrt strength ratio, $[N_{cap}/A_c]/f_{cu}$ | | | | | 41% | |
| | | | | Major | Minor | |
| Design moment, $M_{x y} = \text{MAX}\{ M_{x y p} + M_{add,x y}, M_{e,x y}\}$ | | | | BS110 | 5,000 | 2,000 |
| Design moment, $M_{biaxial} = M_x + \beta.(h'/b').M_y$ or $M_y + \beta.(b'/h').M_x$ | | | | | N/A | 2,684 |
| Design moment, $M_{x y} = \text{MAX}\{ M_{x y p} + N.e_{a,x y} + M_{add,x y}, M_{e,x y}\}$ | | | | EC2 | 9,667 | 3,000 |
| Design moment, $M_{biaxial} = M_x + \beta.(h'/b').M_y$ or $M_y + \beta.(b'/h').M_x$ | | | | | N/A | 4,225 |
| Design moment, $M_{x y} = \text{MAX}\{ M_{x y p} + M_{add,x y}, M_{e,x y}\}$ | | | | ACI318 | 10,200 | 4,200 |
| Design moment, $M_{biaxial} = M_x + \beta.(h'/b').M_y$ or $M_y + \beta.(b'/h').M_x$ | | | | | N/A | 5,145 |
| Design axial stress, $\sigma_N = N/bh$ N/D^2 | | | | | 38.3 | N/mm ² |
| Design axial stress ratio, σ_N/f_{cu} | | | | BS110 | 0.48 | |
| Enh. coeff. for biaxial bending, β | | | | | 0.44 | cl.3.8.4.5 |
| Design axial stress, $\sigma_N = N/bh$ N/D^2 | | | | | 38.3 | N/mm ² |
| Design axial stress ratio, σ_N/f_{ck} | | | | EC2 | 0.59 | |
| Enh. coeff. for biaxial bending, $\beta = 1 - \sigma_N/f_{ck}$ | | | | | 0.41 | T.9.3 MOSLE |
| Design axial stress, $\sigma_N = N/bh$ N/D^2 | | | | | 38.3 | N/mm ² |
| Design nominal axial stress ratio, $\sigma_N/[\phi.f'_c]$ | | | | ACI318 | 0.91 | |
| Enh. coeff. for biaxial bending, $\beta = 1 - \sigma_N/[\phi.f'_c]$ | | | | | 0.30 | T.9.3 MOSLE |
| Uniaxial or biaxial bending ? | | | | | Uniaxial | ▼ |
| Design 1/6 th bending stress, $\sigma_{Mx y} = M_x/bh^2$ M_y/hb^2 M | | | | BS110 | 0.66 | 0.85 |
| Design 1/6 th bending stress ratio, $\sigma_{Mx y}/f_{cu}$ | | | | | 0.01 | 0.01 |
| Design 1/6 th bending stress, $\sigma_{Mx y} = M_x/bh^2$ M_y/hb^2 M | | | | EC2 | 1.28 | 1.28 |
| Design 1/6 th bending stress ratio, $\sigma_{Mx y}/f_{ck}$ | | | | | 0.02 | 0.02 |
| Design 1/6 th bending stress, $\sigma_{Mx y} = M_x/bh^2$ M_y/hb^2 M | | | | ACI318 | 1.35 | 1.79 |
| Design 1/6 th nominal bending stress ratio, $\sigma_{Mx y}/[\phi.f'_c]$ | | | | | 0.03 | 0.04 |
| Effective depth to dimension ratio, $h'/(h D)$ $b'/(b D)$ | | | | | 0.88 | 0.88 |
| | | | | Major | Minor | |
| Longitudinal steel area ratio, $[A_{sc}/A_c].f_y/f_{cu}$ | | | | BS110 | 0.08 | 0.08 |
| Longitudinal steel area %, $[A_{sc}/A_c].100\% = \{[A_{sc}/A_c].f_y/f_{cu}\}$ | | | | | 1.39 | 1.39 |
| Longitudinal steel area ratio, $[A_{sc}/A_c].f_y/f_{ck}$ | | | | EC2 | 0.08 | 0.08 |
| Longitudinal steel area %, $[A_{sc}/A_c].100\% = \{[A_{sc}/A_c].f_y/f_{ck}\}$ | | | | | 1.04 | 1.04 |
| Longitudinal steel area ratio, $[A_{sc}/A_c]$ | | | | ACI318 | 0.016 | 0.021 |
| Longitudinal steel area %, $[A_{sc}/A_c].100\%$ | | | | | 1.60 | 2.10 |

| | | | | |
|---|---|--|-----------|------|
| CONSULTING ENGINEERS | Engineering Calculation Sheet Consulting Engineers | Job No. | Sheet No. | Rev. |
| | | jXXX | 4 | |
| Job Title | | Member Design - Reinforced Concrete Column Slenderness | | |
| Member Design - RC Column Slenderness Effects | | Member/Location | Drg. Ref. | |
| | | Made by | XX | Date |
| | | 20/4/2026 | | Chd. |

| | | | |
|--|--|--------------|--------|
| Interaction Chart [Major Plane] | | Major | BS8110 |
|--|--|--------------|--------|

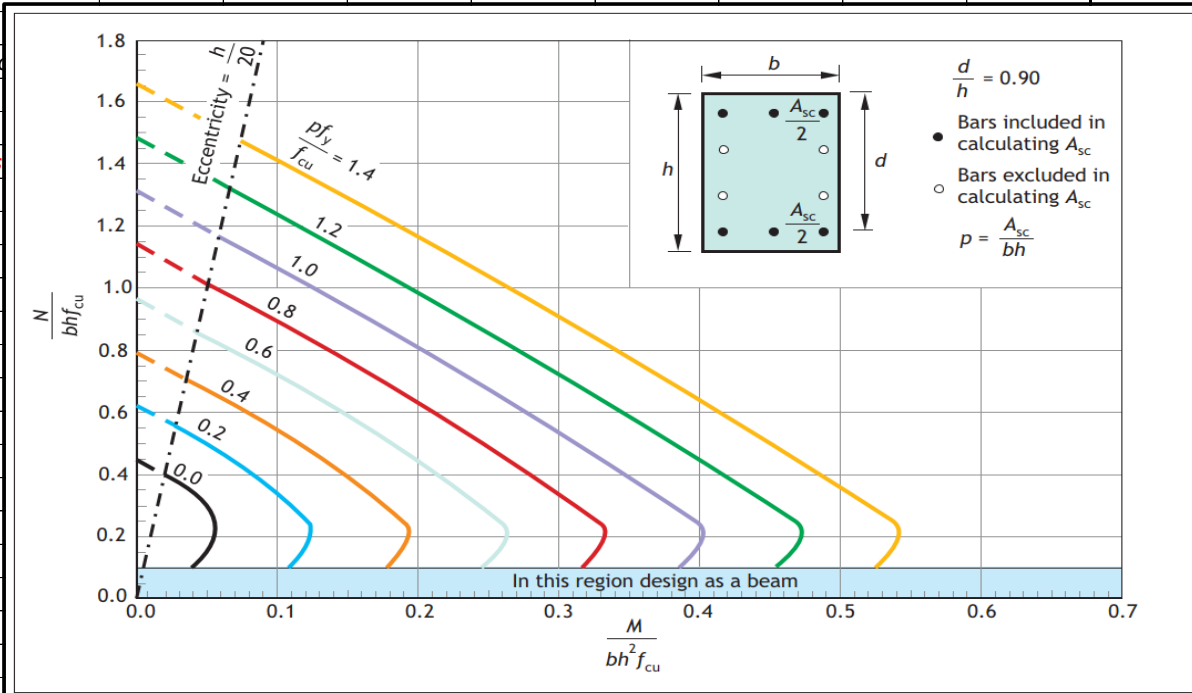


Figure C.4b
Column design chart for rectangular column $d/h = 0.90$

| | | |
|---|-------|------|
| Design axial stress ratio, σ_N/f_{cu} | BS110 | 0.48 |
| Design 1/6 th bending stress ratio, σ_{Mx}/f_{cu} | BS110 | 0.01 |

| | | |
|--|--|--------------|
| Interaction Chart [Minor Plane] | | Minor |
|--|--|--------------|

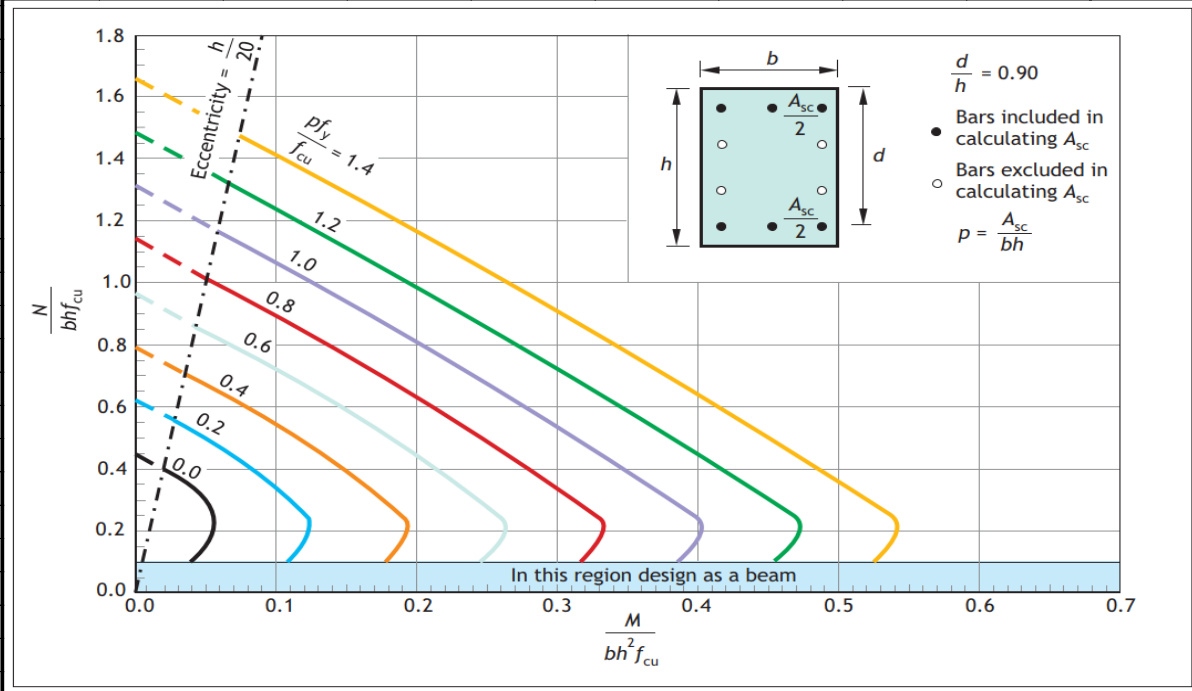



Figure C.4b
Column design chart for rectangular column $d/h = 0.90$

| | | |
|---|-------|------|
| Design axial stress ratio, σ_N/f_{cu} | BS110 | 0.48 |
| Design 1/6 th bending stress ratio, σ_{My}/f_{cu} | BS110 | 0.01 |

Interaction Chart [Major Plane]

Major

Figure 9b
Column design chart for rectangular columns $d_2/h = 0.10$

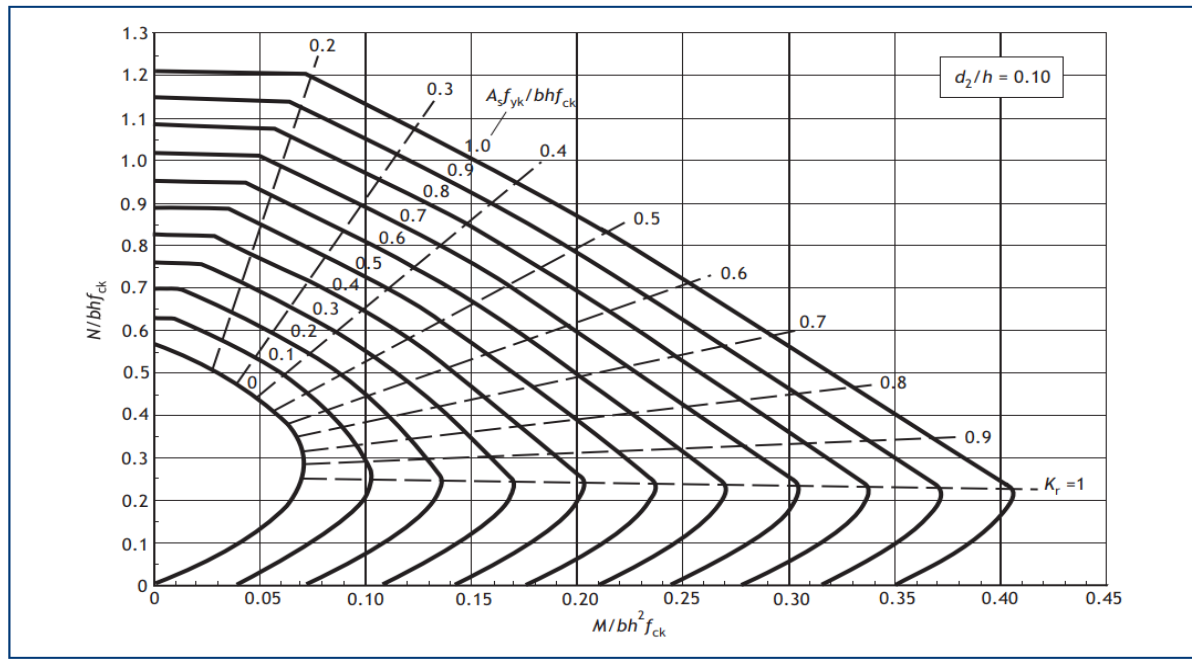

Design axial stress ratio, σ_N/f_{ck}

EC2

0.59


Design 1/6th bending stress ratio, σ_{Mx}/f_{ck}

0.02

Interaction Chart [Minor Plane]

Minor

Figure 9b
Column design chart for rectangular columns $d_2/h = 0.10$

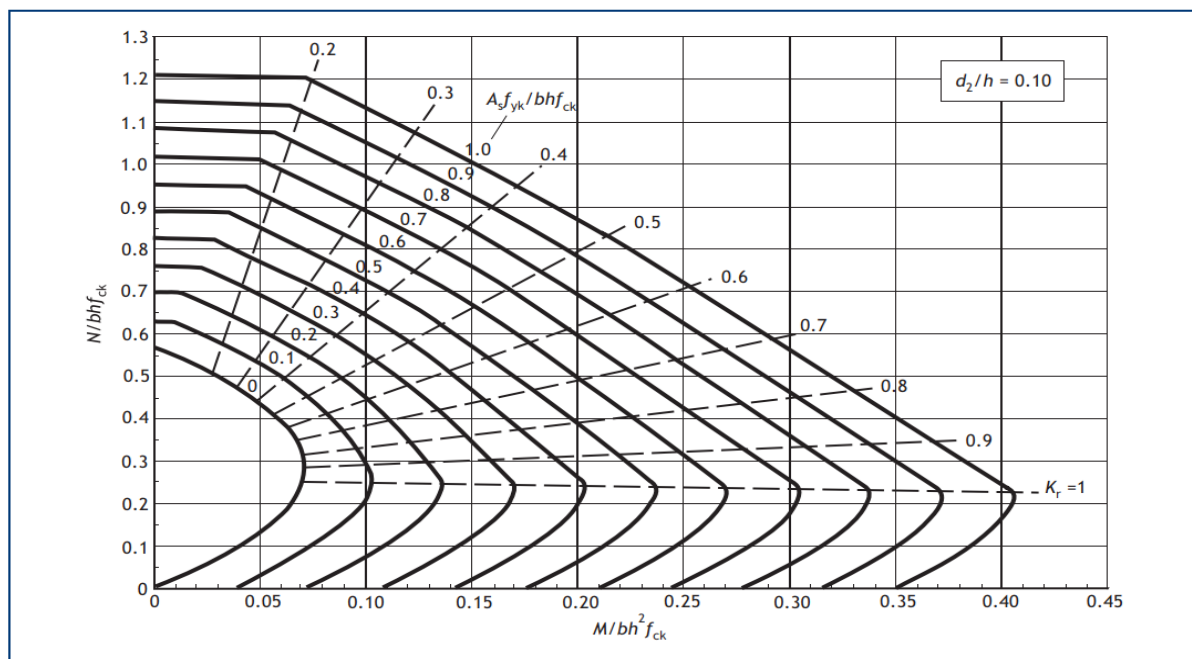

Design axial stress ratio, σ_N/f_{ck}

EC2


0.59

Design 1/6th bending stress ratio, σ_{My}/f_{ck}

0.02

Interaction Chart [Major Plane]

Major

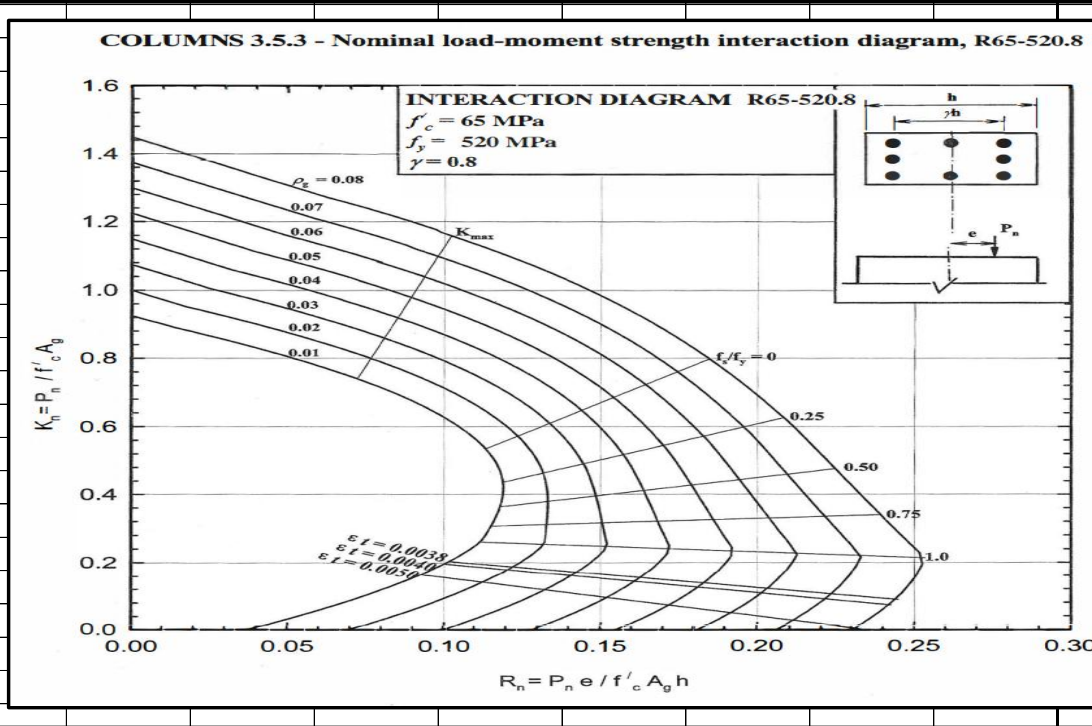

Design nominal axial stress ratio, $\sigma_N / [\phi \cdot f_c']$

ACI318


0.91

Design 1/6th nominal bending stress ratio, $\sigma_{Mx} / [\phi \cdot f_c']$

0.03

Interaction Chart [Minor Plane]

Minor

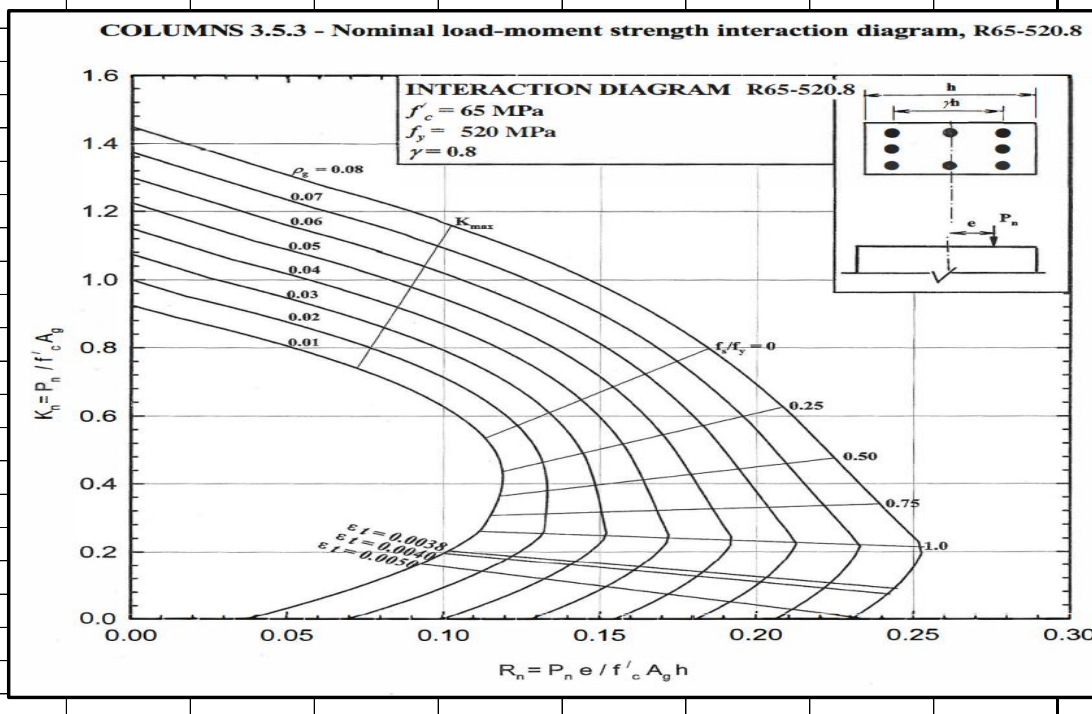

Design nominal axial stress ratio, $\sigma_N / [\phi \cdot f_c']$

ACI318

0.91

Design 1/6th nominal bending stress ratio, $\sigma_{My} / [\phi \cdot f_c']$

0.04

| CONSULTING ENGINEERS | | Engineering Calculation Sheet Consulting Engineers | | Job No. | Sheet No. | Rev. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|------|-----------------|-----------|---------------------|----------------------|-------------------------|--|--|---|---|---|---|------|------|------|---|------|------|------|---|------|------|------|----------------------|-------------------------|--|--|---|---|---|---|-----|-----|-----|---|-----|-----|-----|---|-----|-----|---|---|-----|---|---|
| | | | | jXXX | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Member/Location | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Job Title | Member Design - Reinforced Concrete Column Slenderness | | | Drg. Ref. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Member Design - RC Column Slenderness Effects | | | | Made by | XX | Date 20/4/2026 Chd. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | BS8110 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 1: Bracing Condition | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced or unbraced column ? | | Braced | | ▼ | Braced | ▼ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| cl.3.8.1.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note braced or unbraced column affects slenderness limits criteria, effective height factor; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note braced = {column / wall stabilized by other bracing, shear walls or core walls and outriggers}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note unbraced = {column / wall stabilized by bending in itself (columns in moment frames, tube major plane)}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note unbraced cantilever = {column / wall stabilized by bending in itself (shear wall major plane, cantilever pi | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 5px;"> <p>3.8.1.5 Braced and unbraced columns</p> <p>A column may be considered braced in a given plane if lateral stability to the structure as a whole is provided by walls or bracing or buttressing designed to resist all lateral forces in that plane. It should otherwise be considered as unbraced.</p> </div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 2: Slenderness Limits Criteria Based on Bracing Condition | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max slender clear slenderness $l_{clear,x}/(h D) l_{clear,y}/(b D)$ | | Braced | | 60 | 60 | cl.3.8.1.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Unbraced | | 60 | 60 | cl.3.8.1.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max slender clear height $l_{clear,x} l_{clear,y}$ | | Cantilever | | 174000 | 27931 | mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | cl.3.8.1.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max slender eff. slenderness $l_{eff,x}/(h D) l_{eff,y}/(b D)$ | | Braced | | 40 | 40 | cl.3.9.3.7.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Unbraced | | 30 | 30 | cl.3.8.5, cl.3.9.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max stocky eff. slenderness $l_{eff,x}/(h D) l_{eff,y}/(b D)$ | | Braced | | 15 | 15 | cl.3.8.1.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Unbraced | | 10 | 10 | cl.3.8.1.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 3: Actual Slenderness | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Column effective height, $l_{eff,xy} = \beta_{xy} \cdot l_{clear,xy}$ | | | | 3,443 | 3,443 | mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Column effective height factor, β_{xy} | | | | 0.85 | 0.85 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| End condition at top | | | | 2 | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| End condition at bot. | | | | 2 | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 5px;"> <p align="center">Table 3.19 — Values of β for braced columns</p> <table border="1"> <thead> <tr> <th rowspan="2">End condition at top</th> <th colspan="3">End condition at bottom</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.75</td> <td>0.80</td> <td>0.90</td> </tr> <tr> <td>2</td> <td>0.80</td> <td>0.85</td> <td>0.95</td> </tr> <tr> <td>3</td> <td>0.90</td> <td>0.95</td> <td>1.00</td> </tr> </tbody> </table> <p align="center">Table 3.20 — Values of β for unbraced columns</p> <table border="1"> <thead> <tr> <th rowspan="2">End condition at top</th> <th colspan="3">End condition at bottom</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1.2</td> <td>1.3</td> <td>1.6</td> </tr> <tr> <td>2</td> <td>1.3</td> <td>1.5</td> <td>1.8</td> </tr> <tr> <td>3</td> <td>1.6</td> <td>1.8</td> <td>—</td> </tr> <tr> <td>4</td> <td>2.2</td> <td>—</td> <td>—</td> </tr> </tbody> </table> <p>3.8.1.6.2 End conditions</p> <p>The four end conditions are as follows.</p> <p>a) <i>Condition 1.</i> The end of the column is connected monolithically to beams on either side which are at least as deep as the overall dimension of the column in the plane considered. Where the column is connected to a foundation structure, this should be of a form specifically designed to carry moment.</p> <p>b) <i>Condition 2.</i> The end of the column is connected monolithically to beams or slabs on either side which are shallower than the overall dimension of the column in the plane considered.</p> <p>c) <i>Condition 3.</i> The end of the column is connected to members which, while not specifically designed to provide restraint to rotation of the column will, nevertheless, provide some nominal restraint.</p> <p>d) <i>Condition 4.</i> The end of the column is unrestrained against both lateral movement and rotation (e.g. the free end of a cantilever column in an unbraced structure).</p> </div> | | | | | | | End condition at top | End condition at bottom | | | 1 | 2 | 3 | 1 | 0.75 | 0.80 | 0.90 | 2 | 0.80 | 0.85 | 0.95 | 3 | 0.90 | 0.95 | 1.00 | End condition at top | End condition at bottom | | | 1 | 2 | 3 | 1 | 1.2 | 1.3 | 1.6 | 2 | 1.3 | 1.5 | 1.8 | 3 | 1.6 | 1.8 | — | 4 | 2.2 | — | — |
| End condition at top | End condition at bottom | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 | 2 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0.75 | 0.80 | 0.90 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 0.80 | 0.85 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 0.90 | 0.95 | 1.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| End condition at top | End condition at bottom | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 | 2 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1.2 | 1.3 | 1.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 1.3 | 1.5 | 1.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 1.6 | 1.8 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 2.2 | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Eff. slenderness $l_{eff,x}/(h D) l_{eff,y}/(b D)$ | | | | 1.2 | 3.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Clear height $l_{clear,x} l_{clear,y}$ | | | | 4,050 | 4,050 | mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Clear slenderness $l_{clear,x}/(h D) l_{clear,y}/(b D)$ | | | | 1.4 | 4.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| CONSULTING ENGINEERS | | Engineering Calculation Sheet Consulting Engineers | | Job No. | Sheet No. | Rev. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|---|-------|---------------------|------------------|---------------------|---|------|--------|-------|------|------|-----|-----|-----|-------------|--|--|--|--|--|--|--|--|--|-----|------|------|------|------|------|------|------|---|-----|------|------|------|------|------|------|------|--|-----|------|------|------|------|------|------|------|
| | | | | jXXX | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Member/Location | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Job Title | Member Design - Reinforced Concrete Column Slenderness | | | Drng. Ref. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Member Design - RC Column Slenderness Effects | | | | Made by | XX | Date 20/4/2026 Chd. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | EC2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 1: Bracing Condition | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced or unbraced column ? | | | | Braced | Braced | cl.5.8.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note braced or unbraced column affects slenderness limit | | | | Single Curvature | Single Curvature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note braced = {column / wall stabilized by other bracing, shear walls or core walls and outriggers}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note unbraced = {column / wall stabilized by bending in itself (columns in moment frames, tube major plane)}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note unbraced cantilever = {column / wall stabilized by bending in itself (shear wall major plane, cantilever pier)}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Braced members or systems: structural members or subsystems, which in analysis and design are assumed <i>not</i> to contribute to the overall horizontal stability of a structure</p> <p>Bracing members or systems: structural members or subsystems, which in analysis and design are assumed to contribute to the overall horizontal stability of a structure</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 2: Slenderness Limits Criteria Based on Bracing Condition | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max stocky eff. slenderness, $\lambda_{x y} = l_{eff,x}/r_x \mid l_{eff,y}/r_y$ | | | | Single Curvature | Single Curvature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Unbraced and Cant. [C=1.7-(M ₁ /M ₂ =1)=0.7] | | | | Unbraced Cantilever | 14.5 | 14.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\lambda_{lim} = 20.A.B.C/\sqrt{n} = 20/(1+0.2\phi_{ef}) \cdot \sqrt{(1+2\omega)} \cdot 0.7/\sqrt{n}$ | | | | | | cl.5.8.3.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced Single Curv. [C=1.7-(M ₁ /M ₂ =0)=1.7] | | | | Braced Single | 35.1 | 35.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\lambda_{lim} = 20.A.B.C/\sqrt{n} = 20/(1+0.2\phi_{ef}) \cdot \sqrt{(1+2\omega)} \cdot 1.7/\sqrt{n}$ | | | | | | cl.5.8.3.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced Double Curv. [C=1.7-(M ₁ /M ₂ =-1)=2.7] | | | | Braced Double | 55.8 | 55.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\lambda_{lim} = 20.A.B.C/\sqrt{n} = 20/(1+0.2\phi_{ef}) \cdot \sqrt{(1+2\omega)} \cdot 2.7/\sqrt{n}$ | | | | | | cl.5.8.3.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 3: Actual Slenderness | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Column effective height, $l_{eff,x y} = \beta_{x y} \cdot l_{clear,x y}$ | | | | 4,029 | 3,848 | mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Column effective height factor, $\beta_{x y}$ | | | | 0.99 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\beta = 0.5 \cdot \sqrt{[(1+k_1)/(0.45+k_1)] \cdot [(1+k_2)/(0.45+k_2)]}$ | | | | Braced | 0.99 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\beta = \sqrt{[1+10 \cdot (k_1 \cdot k_2)/(k_1+k_2)]}$ | | | | Unbraced | 14.55 | 4.61 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\beta = (1+k_1/(1+k_1)) \cdot (1+k_2/(1+k_2))$ | | | | Unbraced | 3.91 | 3.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Braced members (see Figure 5.7 (f)):</p> $l_0 = 0.5l \cdot \sqrt{\left(1 + \frac{k_1}{0.45 + k_1}\right) \cdot \left(1 + \frac{k_2}{0.45 + k_2}\right)} \quad (5.15)$ <p>Unbraced members (see Figure 5.7 (g)):</p> $l_0 = l \cdot \max \left\{ \sqrt{1 + 10 \cdot \frac{k_1 \cdot k_2}{k_1 + k_2}} ; \left(1 + \frac{k_1}{1 + k_1}\right) \cdot \left(1 + \frac{k_2}{1 + k_2}\right) \right\} \quad (5.16)$ <p>where: k_1, k_2 are the relative flexibilities of rotational restraints at ends 1 and 2 respectively:</p> <table border="1"> <tr> <td>$\frac{1}{4} \left(\frac{I_c}{I_{column}} \right) = k$</td> <td>0</td> <td>0.0625</td> <td>0.125</td> <td>0.25</td> <td>0.50</td> <td>1.0</td> <td>1.5</td> <td>2.0</td> </tr> <tr> <td>(fixed end)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>l_0 – braced (equation 9.2) {$\times l$}</td> <td>0.5</td> <td>0.56</td> <td>0.61</td> <td>0.68</td> <td>0.76</td> <td>0.84</td> <td>0.88</td> <td>0.91</td> </tr> <tr> <td>l_0 – unbraced (equation 9.3(a) and 9.3(b)). Use greater value {$\times l$}</td> <td>1.0</td> <td>1.14</td> <td>1.27</td> <td>1.50</td> <td>1.87</td> <td>2.45</td> <td>2.92</td> <td>3.32</td> </tr> <tr> <td></td> <td>1.0</td> <td>1.12</td> <td>1.13</td> <td>1.44</td> <td>1.78</td> <td>2.25</td> <td>2.56</td> <td>2.78</td> </tr> </table> | | | | | | | $\frac{1}{4} \left(\frac{I_c}{I_{column}} \right) = k$ | 0 | 0.0625 | 0.125 | 0.25 | 0.50 | 1.0 | 1.5 | 2.0 | (fixed end) | | | | | | | | | l_0 – braced (equation 9.2) { $\times l$ } | 0.5 | 0.56 | 0.61 | 0.68 | 0.76 | 0.84 | 0.88 | 0.91 | l_0 – unbraced (equation 9.3(a) and 9.3(b)). Use greater value { $\times l$ } | 1.0 | 1.14 | 1.27 | 1.50 | 1.87 | 2.45 | 2.92 | 3.32 | | 1.0 | 1.12 | 1.13 | 1.44 | 1.78 | 2.25 | 2.56 | 2.78 |
| $\frac{1}{4} \left(\frac{I_c}{I_{column}} \right) = k$ | 0 | 0.0625 | 0.125 | 0.25 | 0.50 | 1.0 | 1.5 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (fixed end) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| l_0 – braced (equation 9.2) { $\times l$ } | 0.5 | 0.56 | 0.61 | 0.68 | 0.76 | 0.84 | 0.88 | 0.91 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| l_0 – unbraced (equation 9.3(a) and 9.3(b)). Use greater value { $\times l$ } | 1.0 | 1.14 | 1.27 | 1.50 | 1.87 | 2.45 | 2.92 | 3.32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.0 | 1.12 | 1.13 | 1.44 | 1.78 | 2.25 | 2.56 | 2.78 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Eff. slenderness $\lambda_{x y} = l_{eff,x}/r_x \mid l_{eff,y}/r_y$ | | | | 4.8 | 14.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| CONSULTING ENGINEERS | | Engineering Calculation Sheet Consulting Engineers | | Job No. | Sheet No. | Rev. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|-------|-----------------|------------------|---------------------|---|------|--------|-------|------|------|-----|-----|-----|--|-------------|--|--|--|--|--|--|--|------------------------------------|-----|------|------|------|------|------|------|------|---|-----|------|------|------|------|------|------|------|--|-----|------|------|------|------|------|------|------|
| | | | | jXXX | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Member/Location | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Job Title | Member Design - Reinforced Concrete Column Slenderness | | | Drng. Ref. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Member Design - RC Column Slenderness Effects | | | | Made by | XX | Date 20/4/2026 Chd. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | ACI318 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 1: Bracing Condition | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced or unbraced column (non-sway or sway) ? | | Braced | | ▼ | Braced | ▼ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note braced or unbraced column affects slenderness limit | | Single Curvature | | ▼ | Single Curvature | ▼ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note braced = {column / wall stabilized by other bracing, shear walls or core walls and outriggers}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note unbraced = {column / wall stabilized by bending in itself (columns in moment frames, tube major plane)}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note unbraced cantilever = {column / wall stabilized by bending in itself (shear wall major plane, cantilever pier)}; | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced check method 1: | | $\Sigma I_{braced\ walls/columns} \leq 1/12^{th} \Sigma I_{bracing\ walls}$ | | Note | | cl.6.2.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced check method 2: | | $\Sigma V_{braced\ walls/columns} \leq 1/12^{th} \Sigma V_{bracing\ walls}$ | | Note | | cl.6.2.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced check method 2: | | $\Sigma M_{braced\ walls/columns} \leq 1/12^{th} \Sigma M_{bracing\ walls}$ | | Note | | cl.6.2.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced check method 3: | | $Q \leq 0.25$ or $\lambda \geq 4.0$, but with P-Δ | | Note | | cl.6.2.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced check method 4: | | $Q \leq 0.05$ or $\lambda \geq 20$, and without P-Δ | | Note | | cl.6.6.4.3(b) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 2: Slenderness Limits Criteria Based on Bracing Condition | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max stocky eff. slenderness, $\lambda_{x y} = l_{eff,x}/r_x \mid l_{eff,y}/r_y$ | | Single Curvature | | ▼ | Single Curvature | ▼ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Unbraced and Cant. | | Unbraced Cantilever | | | | cl.6.2.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\lambda_{lim} = 22$ | | 22.0 | | | 22.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced Single Curv. [$M_1/M_2=0$] | | Braced Single | | | | cl.6.2.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\lambda_{lim} = \text{MIN}\{40, 34-12M_1/M_2\} = 34$ | | 34.0 | | | 34.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braced Double Curv. [$M_1/M_2=-1$] | | Braced Double | | | | cl.6.2.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\lambda_{lim} = \text{MIN}\{40, 34-12M_1/M_2\} = 40$ | | 40.0 | | | 40.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step 3: Actual Slenderness | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Column effective height, $l_{eff,x y} = \beta_{x y} \cdot l_{clear,x y}$ | | 4,029 | | | 3,848 | mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Column effective height factor, $\beta_{x y}$ | | 0.99 | | | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\beta = 0.5 \cdot \sqrt{(1+k_1/(0.45+k_1)) \cdot (1+k_2/(0.45+k_2))}$ | | Braced | | | 0.99 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\beta = \sqrt{1+10 \cdot (k_1 \cdot k_2)/(k_1+k_2)}$ | | Unbraced | | | 14.55 | 4.61 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\beta = (1+k_1/(1+k_1)) \cdot (1+k_2/(1+k_2))$ | | Unbraced | | | 3.91 | 3.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Braced members (see Figure 5.7 (f)):</p> $l_0 = 0.5 \cdot \sqrt{\left(1 + \frac{k_1}{0.45 + k_1}\right) \cdot \left(1 + \frac{k_2}{0.45 + k_2}\right)} \quad (5.15)$ <p>Unbraced members (see Figure 5.7 (g)):</p> $l_0 = l \cdot \max \left\{ \sqrt{1 + 10 \cdot \frac{k_1 \cdot k_2}{k_1 + k_2}} ; \left(1 + \frac{k_1}{1 + k_1}\right) \cdot \left(1 + \frac{k_2}{1 + k_2}\right) \right\} \quad (5.16)$ <p>where: k_1, k_2 are the relative flexibilities of rotational restraints at ends 1 and 2 respectively:</p> <table border="1"> <tr> <td>$\frac{1(I/I_{column})}{4(I/I_{beam})} = k$</td> <td>0</td> <td>0.0625</td> <td>0.125</td> <td>0.25</td> <td>0.50</td> <td>1.0</td> <td>1.5</td> <td>2.0</td> </tr> <tr> <td></td> <td>(fixed end)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>l_0 – braced (equation 9.2) {×l}</td> <td>0.5</td> <td>0.56</td> <td>0.61</td> <td>0.68</td> <td>0.76</td> <td>0.84</td> <td>0.88</td> <td>0.91</td> </tr> <tr> <td>l_0 – unbraced (equation 9.3(a) and 9.3(b)). Use greater value {×l}</td> <td>1.0</td> <td>1.14</td> <td>1.27</td> <td>1.50</td> <td>1.87</td> <td>2.45</td> <td>2.92</td> <td>3.32</td> </tr> <tr> <td></td> <td>1.0</td> <td>1.12</td> <td>1.13</td> <td>1.44</td> <td>1.78</td> <td>2.25</td> <td>2.56</td> <td>2.78</td> </tr> </table> | | | | | | | $\frac{1(I/I_{column})}{4(I/I_{beam})} = k$ | 0 | 0.0625 | 0.125 | 0.25 | 0.50 | 1.0 | 1.5 | 2.0 | | (fixed end) | | | | | | | | l_0 – braced (equation 9.2) {×l} | 0.5 | 0.56 | 0.61 | 0.68 | 0.76 | 0.84 | 0.88 | 0.91 | l_0 – unbraced (equation 9.3(a) and 9.3(b)). Use greater value {×l} | 1.0 | 1.14 | 1.27 | 1.50 | 1.87 | 2.45 | 2.92 | 3.32 | | 1.0 | 1.12 | 1.13 | 1.44 | 1.78 | 2.25 | 2.56 | 2.78 |
| $\frac{1(I/I_{column})}{4(I/I_{beam})} = k$ | 0 | 0.0625 | 0.125 | 0.25 | 0.50 | 1.0 | 1.5 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | (fixed end) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| l_0 – braced (equation 9.2) {×l} | 0.5 | 0.56 | 0.61 | 0.68 | 0.76 | 0.84 | 0.88 | 0.91 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| l_0 – unbraced (equation 9.3(a) and 9.3(b)). Use greater value {×l} | 1.0 | 1.14 | 1.27 | 1.50 | 1.87 | 2.45 | 2.92 | 3.32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.0 | 1.12 | 1.13 | 1.44 | 1.78 | 2.25 | 2.56 | 2.78 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Major | Minor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Eff. slenderness $\lambda_{x y} = l_{eff,x}/r_x \mid l_{eff,y}/r_y$ | | 4.8 | | | 14.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

